

10MHZ-8GHZ INNER DC BLOCK
500HM SMA MALE TO SMA FEMALE
P/NO.STI09-0001



SPECIFICATION


Frequency	10MHz-8GHz
Insertion Loss:	0.5dB(Max.)
VSWR:	1.25:1(Max.)
Operating Voltage:	60V(Max.)
VSWR:	1.2:1(Max.)
Impedance:	50Ohm
Durability:	500 Cycles

MATERIAL LIST



Part	Material	Plated
Housing	Brass	Nickel
Center Conductor	Brass	Gold
Insualtor	Teflon	

OUTLING DRAWING

Unit:mm

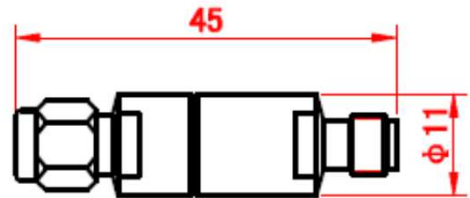

TESTING DATA (100% S-PARAMETER TESTED)

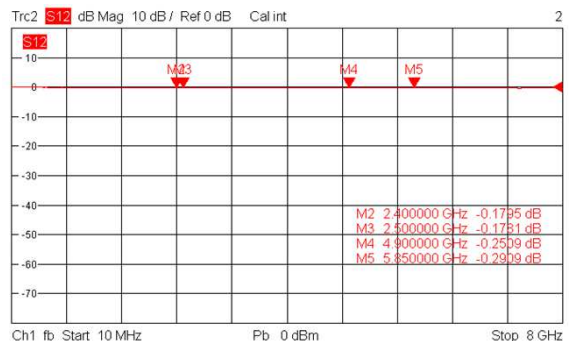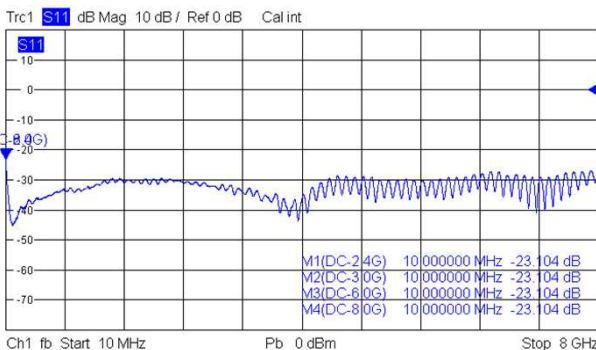

Any more request, please contact sales@solvangtech.com. Thank you ~

10MHZ-18GHZ INNER DC BLOCK

500HM SMA MALE TO SMA FEMALE

P/NO.STI09-0002



SPECIFICATION


Frequency	10MHz-8GHz
Insertion Loss:	1.0dB(Max.)
VSWR:	1.5:1(Max.)
Operating Voltage:	60V(Max.)
Impedance:	50Ohm
Durability:	500 Cycles

MATERIAL LIST



Part	Material	Plated
Housing	Brass	Nickel
Center Conductor	Brass	Gold
Insulator	Teflon	

OUTLING DRAWING

Unit:mm

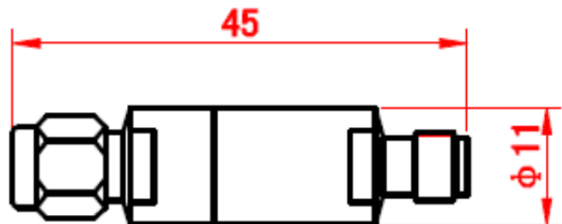

TESTING DATA (100% S-PARAMETER TESTED)

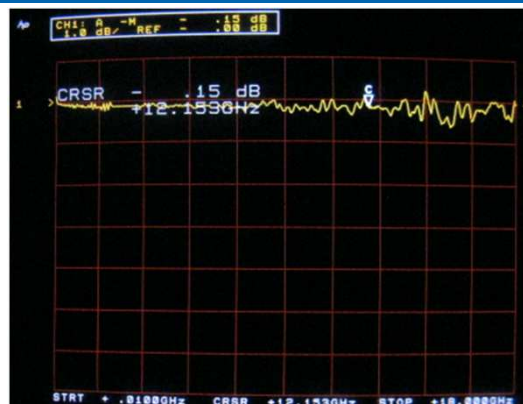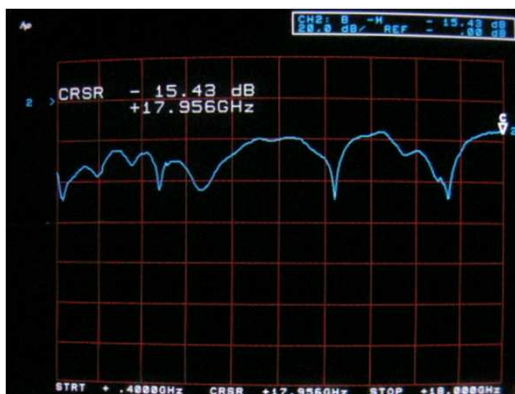

Any more request, please contact sales@solvangtech.com. Thank you ~