

6GHZ FIXED ATTENUATOR

SMA MALE TO SMA FEMALE RATED TO 10W

P/NO.STI02-3300-XX



SPECIFICATION

Frequency	DC-6GHz
Attenuation Value:	3,5,6,10,15,20,30dB
Attenuation Accuracy:	3,5,6dB:± 0.6dB 10,15dB:± 0.7dB 20dB:± 0.8dB 30dB:± 1.0dB
VSWR:	1.25:1(Max.)
Power :	10W Avg. 1KW Peak
Impedance:	50Ohm
Durability:	500 Cycles


MATERIAL LIST

Part	Material	Plated
Outer Conductor	Brass	Nickel
Center Conductor	Brass	Gold
Housing	Aluminum	Black

OUTLING DRAWING



Unit:mm

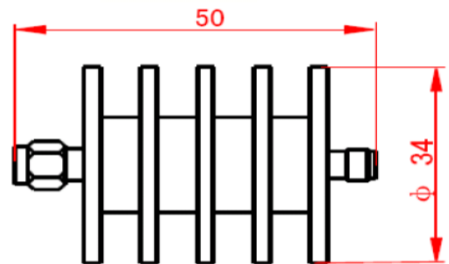

TESTING DATA (100% S-PARAMETER TESTED)

