

40GHZ 10DB FIXED ATTENUATOR

2.92MM MALE TO FEMALE RATED TO 2W

P/NO.STI02-6200-XX



SPECIFICATION


Frequency	DC-40GHz
Attenuation Value:	3,610,20,30dB
Attenuation Accuracy:	3,6dB:± 0.5dB@DC-26.5GHz 10,20,30dB:± 0.6dB@DC-26.5GHz 3,6dB:± 0.8dB@26.5-40GHz 10,20,30dB:± 1.0dB@26.5-40GHz
VSWR:	1.3:1(Max.)@DC-18GHz 1.4:1(Max.)@18-40GHz
Power :	2W Avg.@25°C
Impedance:	50Ohm
Durability:	500 Cycles

MATERIAL LIST

Part	Material	Plated
Outer Conductor	Brass	Nickel
Center Conductor	Brass	Gold
Housing	Stainless	Black


OUTLING DRAWING

Unit:mm

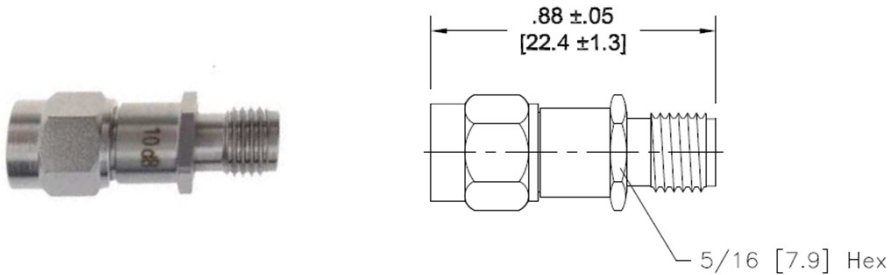

TESTING DATA (100% S-PARAMETER TESTED)

10dB Test Report

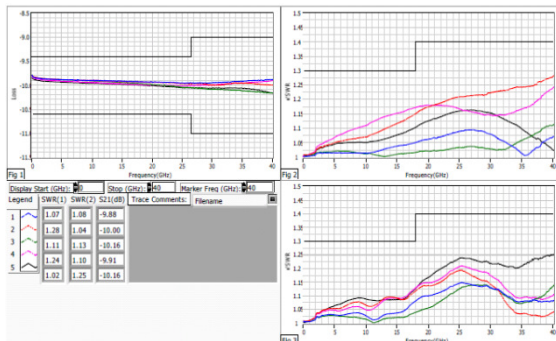

10dB Test Report

