



2-8GHZ 6WAY SMA ISOLATED POWER DIVIDER

RATED TO 20W

P/NO.STI08-0031




SPECIFICATION

Frequency	2-8GHz
Isolation:	18dB(Min.)
Insertion Loss:	1.5dB(Max.)(excluding Theoretical Loss:7.8dB)
VSWR:	Input:1.4:1(Max.) Output:1.3:1(Max.)
Power :	Forward:30W/Reverse:2W
Amplitude Unbalance:	±0.6dB(Max.)
Phase Unbalance:	±4°(Max.)
Impedance:	50Ohm
Durability:	500 Cycles
Operating Temp.:	-40~75°C

MATERIAL LIST

Part	Material	Plated
Connector	Stainless Steel	

OUTLINE DRAWING

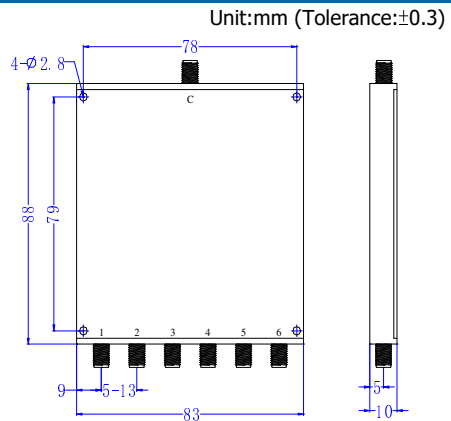

TESTING DATA (100% S-PARAMETER TESTED)

