

## 10MHZ-18GHZ INNER DC BLOCK

### 500HM SMA MALE TO SMA FEMALE

### P/NO.STI09-0002



#### SPECIFICATION


Frequency	10MHz-8GHz
Insertion Loss:	1.0dB(Max.)
VSWR:	1.5:1(Max.)
Operating Voltage:	60V(Max.)
Impedance:	50Ohm
Durability:	500 Cycles

#### MATERIAL LIST

Part	Material	Plated
Housing	Brass	Nickel
Center Conductor	Brass	Gold
Insulator	Teflon	

#### OUTLING DRAWING

Unit:mm

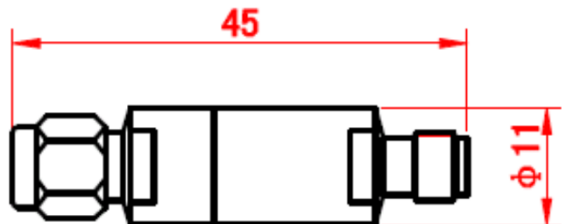

#### TESTING DATA ( 100% S-PARAMETER TESTED)

