



0.01-50GHZ INNER DC BLOCK

500HM 2.4MM MALE TO 2.4MM FEMALE

P/NO.STI09-0007



SPECIFICATION


Frequency	10MHz-50GHz
Insertion Loss:	0.6dB(Max.)
VSWR:	1.35:1(Max.)
DC Input Voltage:	60V(Max.)
Input Power:	2W CW(Max.)
Impedance:	50Ohm
Durability:	500 Cycles
Temperature:	-55°C~100°C

MATERIAL LIST


Part	Material	Plated
Housing	Stainless Steel	Passivated
Center Conductor	Beryllium Copper	Gold

OUTLING DRAWING

Unit:mm Tolerance:±1%

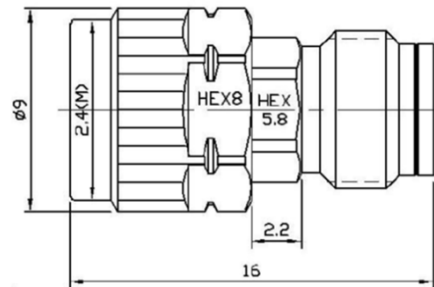

TESTING DATA (100% S-PARAMETER TESTED)

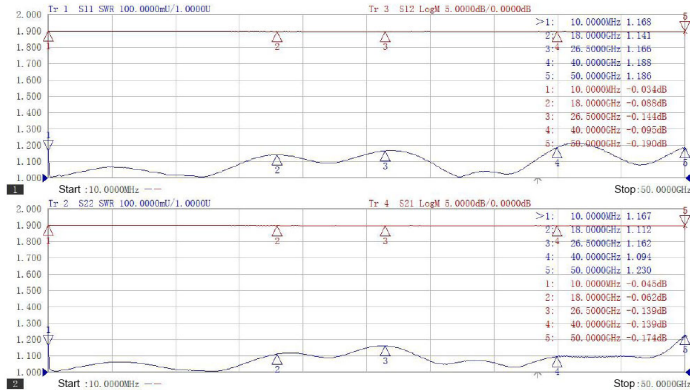

Any more request, please contact sales@solvangtech.com. Thank you ~