



**2300-2400MHZ NOTCH FILTER  
WITH SMA FEMALE CONNECTORS  
P/NO.STI15-9815**



**SPECIFICATION**

Rejection Band	2300~2400MHz
Notch Depth	50dB min.
Passband	DC-2270MHz,2430~8000MHz
Insertion Loss	3.0dB max.
Return Loss	9.5dB min.
Power Handling	10W
Impedance	50 Ohm
Operating Temperature	0~+ 55℃
Connector Type	SMA Female

**MATERIAL LIST**


Part	Material	Plated
Housing	Aluminum	
Connector Body	Stainless Steel	
Center Contact	Barss	Gold

**OUTLINE DRAWING**

Unit:mm



**TESTING DATA ( 100% S-PARAMETER TESTED)**

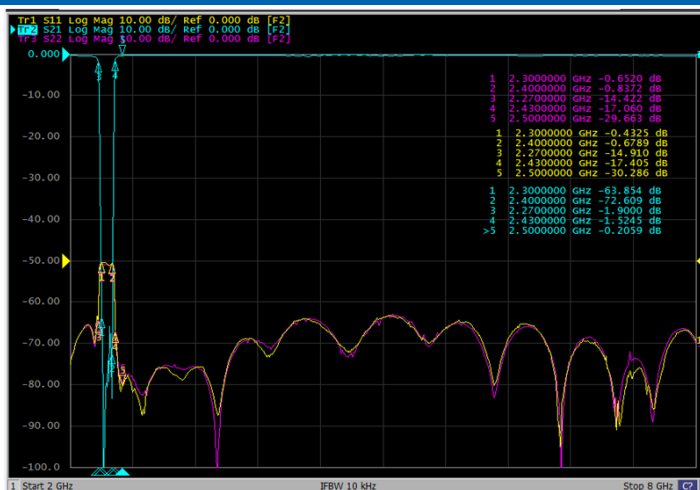

Any more request, please contact sales@solvangtech.com. Thank you ~