



**902-982MHZ NOTCH FILTER
WITH SMA FEMALE CONNECTORS
P/NO.STI15-9833**




SPECIFICATION

Rejection Band	902-928MHz
Notch Depth	50dB min.
Passband	DC-892MHz,938-2570MHz
Insertion Loss	1.0dB max.@DC-882MHz,948-2570MHz 2.5dB max.@882-892MHz,938-948MHz
Return Loss	14dB min.
Power Handling	10W
Impedance	50 Ohm
Operating Temperature	0~+ 55°C
Connector Type	SMA Female

MATERIAL LIST

Part	Material	Plated
Housing	Aluminum	
Connector Body	Stainless Steel	
Center Contact	Barss	Gold

OUTLING DRAWING

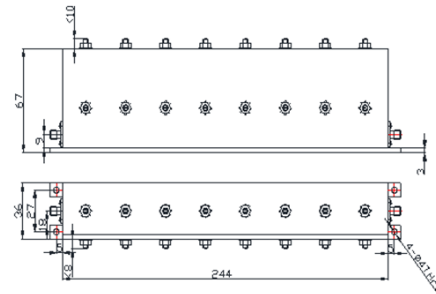

TESTING DATA (100% S-PARAMETER TESTED)

