



**3500-3700MHZ NOTCH FILTER
WITH SMA FEMALE CONNECTORS
P/NO.STI15-9850**



SPECIFICATION


Rejection Band	3500-3700MHz
Notch Depth	50dB min.
Passband	DC-3475MHz,3725-8000MHz
Insertion Loss	3.0dB max.
Return Loss	9.5dB min.
Power Handling	10W
Impedance	50 Ohm
Operating Temperature	0~+ 55°C
Connector Type	SMA Female
Weight:	≤0.94Kg

MATERIAL LIST

Part	Material	Plated
Housing	Aluminum	
Connector Body	Stainless Steel	
Center Contact	Barss	Gold

OUTLINE DRAWING

Unit:mm

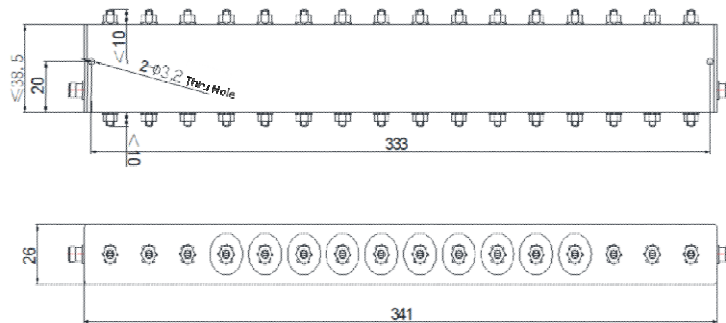

TESTING DATA (100% S-PARAMETER TESTED)

