

## 3550-3700MHZ NOTCH FILTER WITH SMA FEMALE CONNECTORS P/NO.STI15-9898



### SPECIFICATION


Rejection Band	3550-3700MHz
Notch Depth	40dB min.
Passband	DC-3535MHz ,3715-4400MHz
Insertion Loss	2.0dB max.
Return Loss	10dB min.
Power Handling	10W
Impedance	50 Ohm
Operating Temperature	0~+ 55℃
Connector Type	SMA Female

### MATERIAL LIST


Part	Material
Housing	Aluminum
Connector Body	Stainless Steel
Connector Contact	Barss

### OUTLING DRAWING

Unit:mm

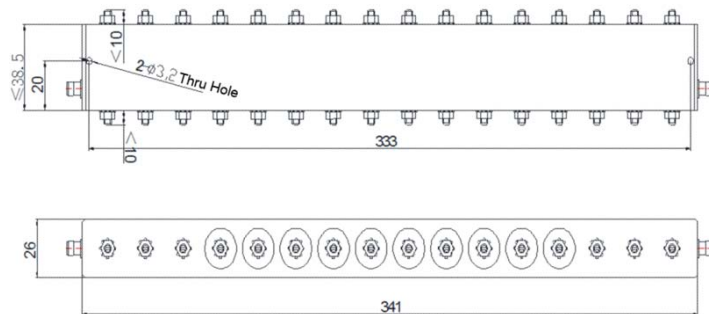

### TESTING DATA ( 100% S-PARAMETER TESTED)

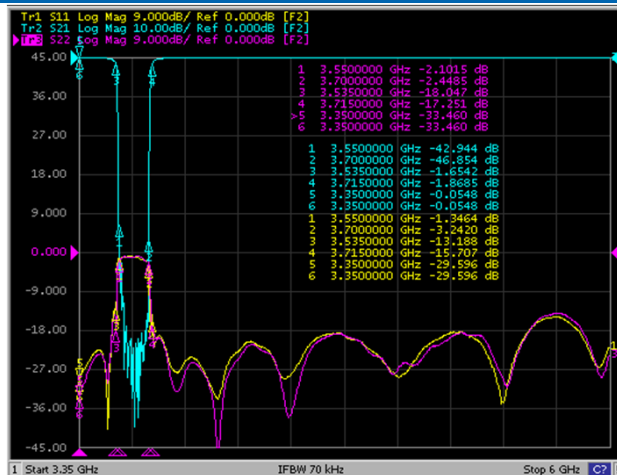

Any more request, please contact [sales@solvangtech.com](mailto:sales@solvangtech.com). Thank you ~